



EH 80/8

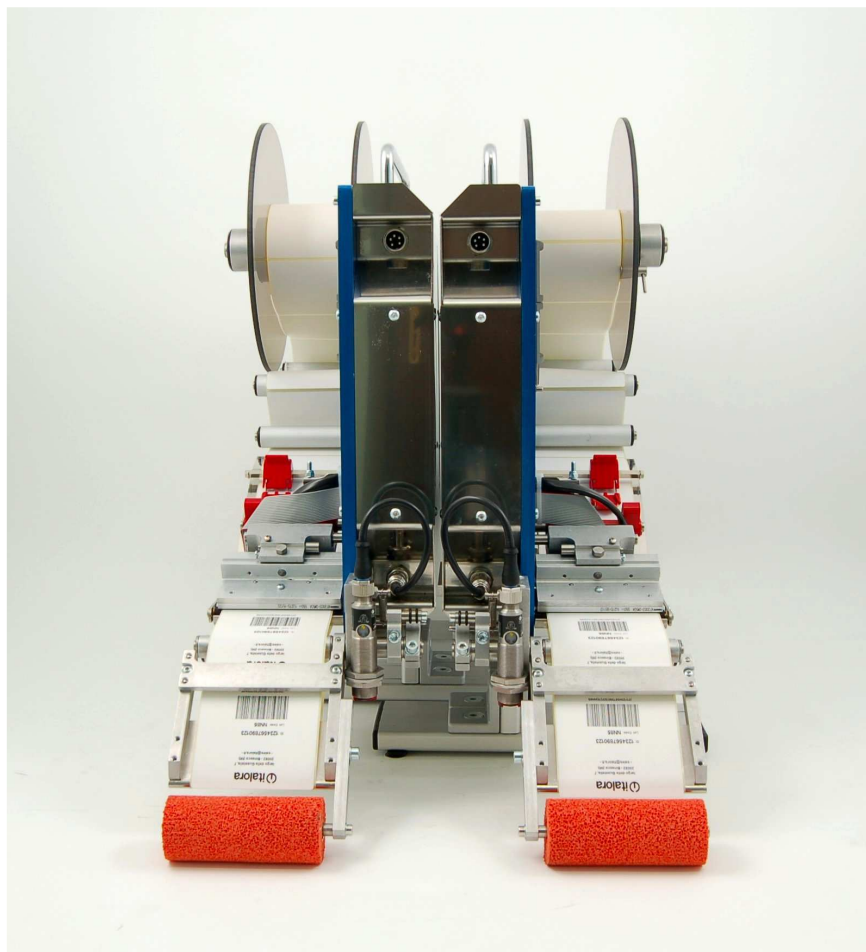

EH 80/8

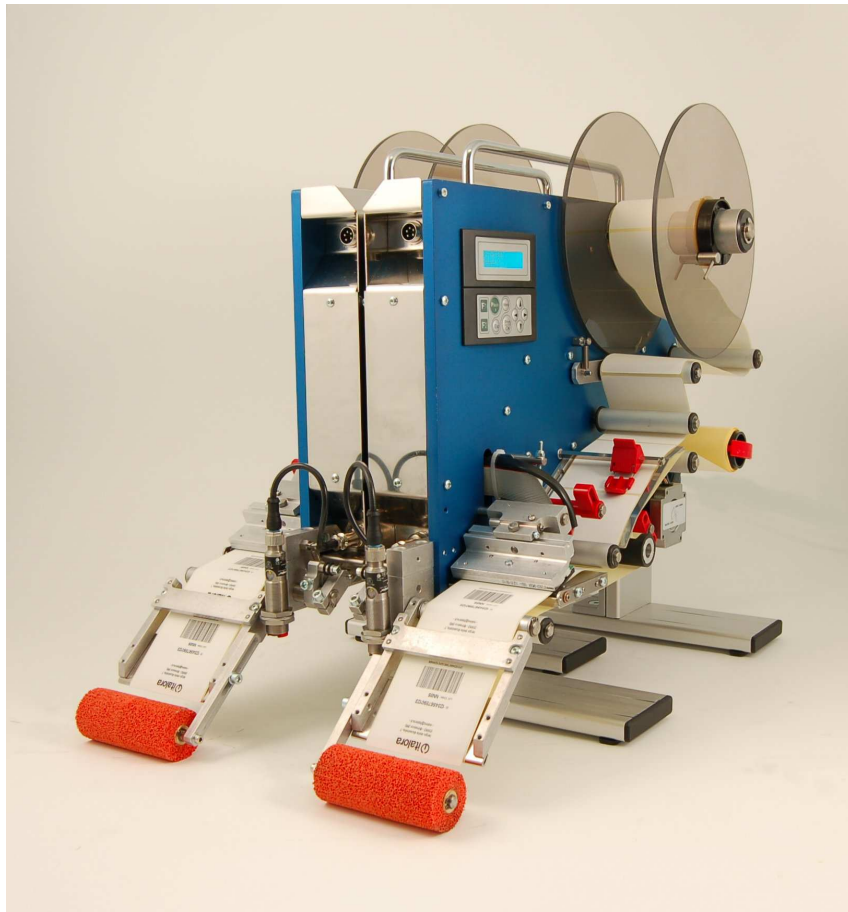

EH 80/8

Specifications

Printing technique:	direct thermal
Versions	left or right-handed
Resolution:	8 dots/mm (200 dpi)
Max. label size:	90 mm
Printing area:	80 x 1600 mm
Printing speed:	300 mm/sec
Print modes:	dispensing
Display	LCD alphanumeric 16 characters x 2 rows, 8 colours
Keyboard	10 Keys membrane panel
Memory:	8 MB flash, 16 Mb RAM
Barcodes:	EAN8, EAN13, 2/5, 2/5 I, 3/9, 2/7, DUN-14/16, UPC-A, UPC-B, UPC-E, CODE128, EAN128, Code 32, PZN, Code 93, PDF 417, Datamatrix, GS1 Databar, QR Code
Fonts:	5 matrix and 6 proportional, up to 112 customized
Font magnification:	9 x 9
Rotations:	four orthogonal directions
Graphic and logos:	bit image mode
Layouts:	26 programmable in FLASH, 100 fields each
Numerators:	4 numerics up /down, text or barcode, 16 digits
Real time clock:	automatic calculation of future dates (expiration, best before, etc.)
Media types:	die cut labels
Supply roll:	outer diameter: up to 220 mm
Communication ports:	serial RS232/422/485, USB, ETHERNET
I/O signals	2 channels I/O interface (1 IN, 1 OUT opto-coupled signals)
Dimensions:	405 mm (H) – 205 mm (W) – 465 mm (D)
Weight:	14 kg
Power requirements:	90 - 260 Vac; 50 - 60 Hz
Environment:	operating temperature: 0°/+ 40° C humidity: 10% to 95% non condensing
Options:	Peel-off/apply device
Firmware:	updates downloadable via PC



Italora S.r.L. Largo Guastalla 7 - 20082 Binasco - (Milano) - Italy
phone +39.02.90092074 - fax +39.02.9055461
<http://www.italora.it> e-mail: sales@italora.it